


Recoup EU Easyfit WWHR

Technical Data & Specifications

Description	Value	Unit
Minimum height required for installation	95	mm
Overall product length	1176	mm
Overall product width	386	Mm
Shower flow rate range	5-15	L/min
Max. mains water inlet pressure	10	Bar
Min. mains water inlet pressure	1	Bar
Max. mains water working temp.	60	°C
Mains water connection	½" male	BSP (par.)
Waste water connection	50	mm
Full product weight (boxed)	9.7	Kg
Water volume – mains water	0.87	L
Heat exchanger material: double walled copper tube		
Outside material: ABS		
Levelling screws: steel – 6mm		

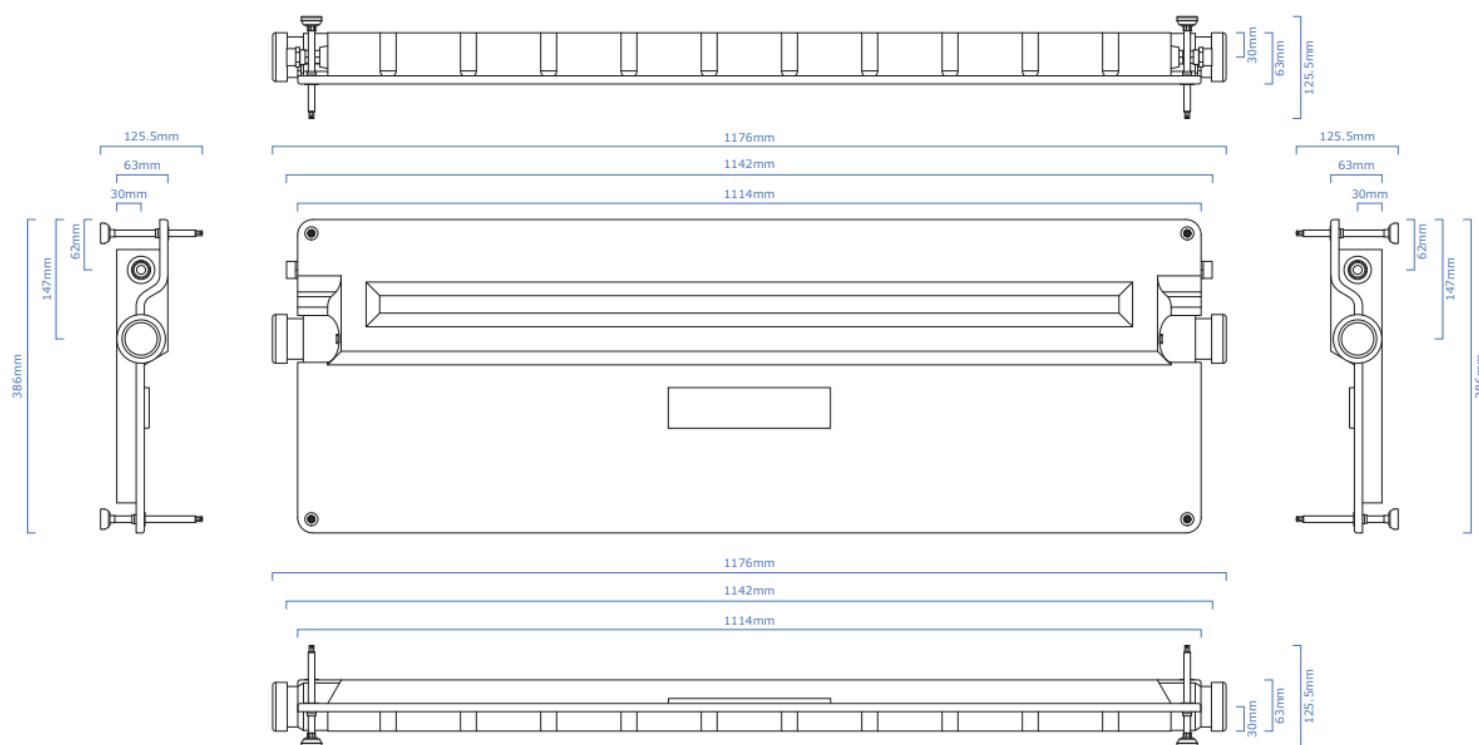

Technical Specification & Performance

Flowrate @ 40 °C	Efficiency and supplied power (cold inlet mains water temp. 10 °C)	Pressure drop in bar
5.8 L/min.	47.6% (5.5 kW)	0.09
9.2 L/min.	46.4% (9.0 kW)	0.26
11.0 L/min.	44.2% (10.2 kW)	0.36
12.5 L/min.	41.8% (11.0 kW)	0.44

Connection Schemes

