


Recoup Sanura Line Flatmate SW WWHR

Technical Data & Specifications

os.	Component	Details
1	Base Tray	Durable ABS 745 x 745 x 80 (65)mm : 4,8 kg
2	Top	Durable ABS with anti-slip (Flatmate+ Flexiteek PVC)
3	Heat Exchanger	Copper (Cu-DHP/ASME SB-75)
4-9	Various small parts	Durable recyclable materials
10,15,16	Valve + accessories	Chromed brass
11-14, 17-20	Various small parts	Durable recyclable materials
-	Potable water connections	¾" (BSP.Par.)
-	Backflow protection	EN1717-compliant Kiwa approved ball valve and non-return valve

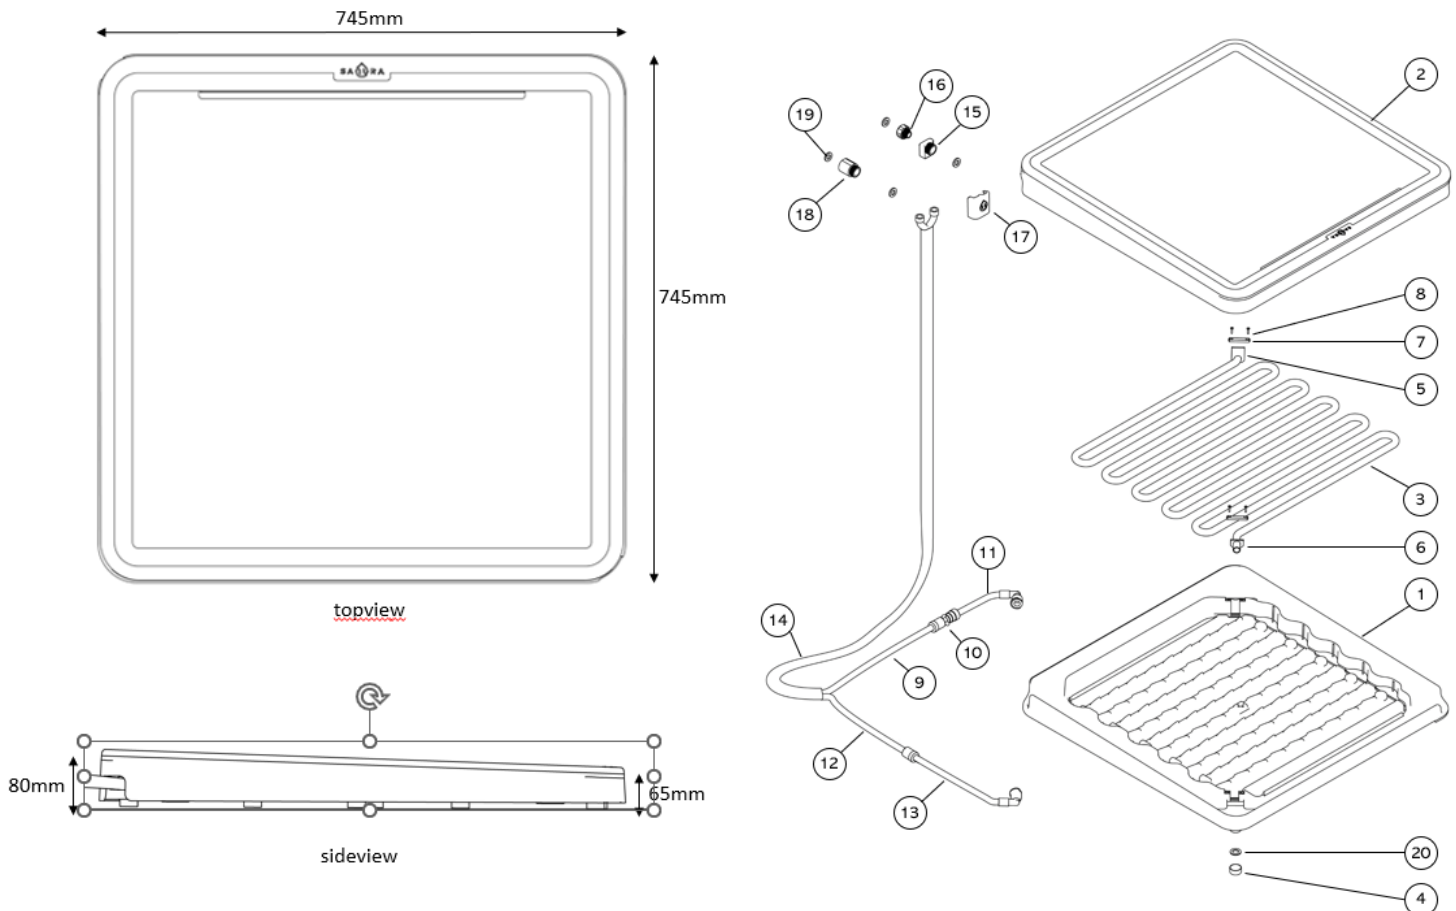

Technical Specification & Performance

Parameter	Flatmate SW	
Efficiency 5.8 l/min	40.2%	0.15 bar pressure drop
Efficiency 9.2 l/min	36.6%	0.34 bar pressure drop
Content potable water	0.90 liter	
Max. pressure potable water side	7 bar	1 bar min / 3 bar recommended
Max. load	200 kg	
Max. temperature	60 °C	

Connection Schemes

