
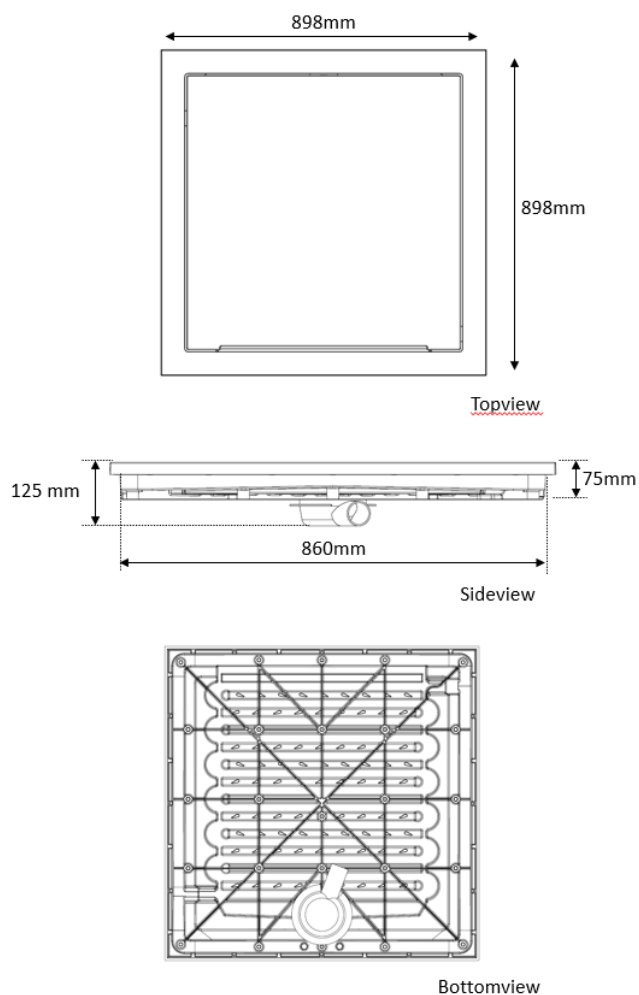


Recoup Sanura Line X-Tray WWHR

Technical Data & Specifications

Pos.	Qty	Component	Details
1		Top Plate	Recyclable ABS 898 x 898 x 125 (75) mm (or 90 x 120)
2		Edge	Recyclable ABS / solid surface
3		Bottom tray with Drain (4)	Recyclable ABS / Flexiteek (PVC)
5		Heat exchanger tube	Copper (Cu-DHP/ASME SB-75)
6-9		Small installation parts	Connection size ½"

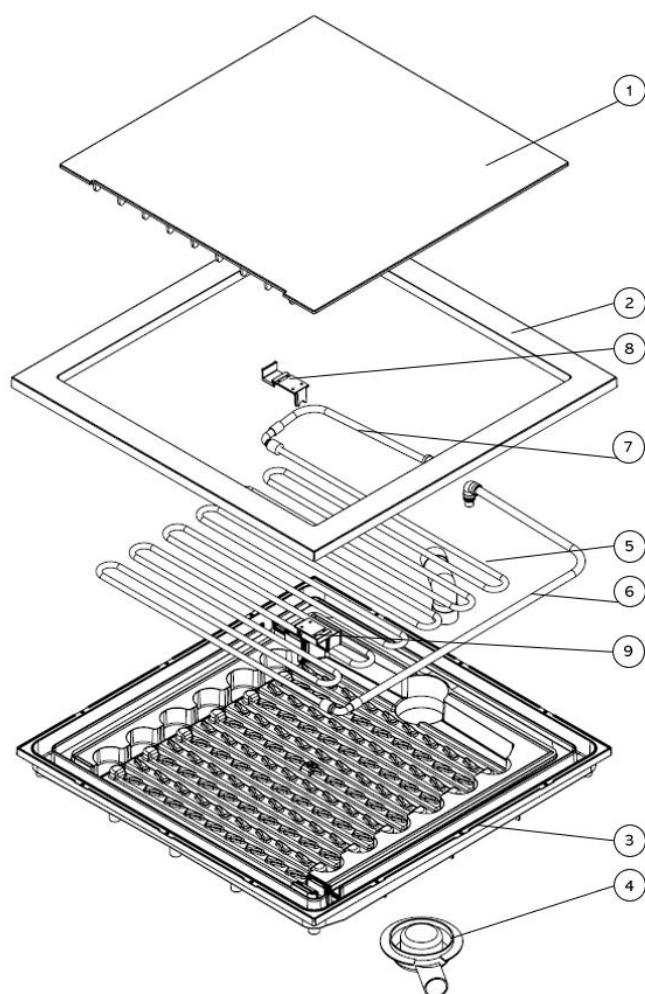

Technical Specification & Performance

Parameter		
Efficiency 5.8 l/min	47.8%	0.18 bar Pressure drop
Efficiency 9.2 l/min	43.5%	0.45 bar Pressure drop
Efficiency 12.5 l/min	40.0%	0.80 bar Pressure drop
Max. water pressure	7 bar	(min. water pressure 1 bar)
Content potable water	1.1L	
Max. temperature	60 °C	
Max. load	200 kg	

Connection Schemes

