

Recoup WWHR VX Series

Installation Manual

Shower Pipe WWHRS - Recoup VX 1700
Shower Pipe WWHRS - Recoup VX 2100
Shower Pipe WWHRS - Recoup VX 2100 HF (High Flow)

Technical sheet / Installation manual

- Always respect the applicable local laws and regulations
- Installation must be carried out by professional installer, in accordance with this installation manual
- Non-compliance installation will lead to loss of warranty



Index


1.	Technical data, connections, content & sketches	Pag. 2+3
2.	Technical specifications, performance & connection diagrams & warranty	Pag. 4
3.	Safety & comfort, considerations <i>before</i> mounting	Pag. 5
4.	Mounting instructions	Pag. 6+7

Technical Data & Connections

Pos.	Qty	Component	Technical data / connections	
1	1x	Double walled, full copper heat exchanger (Cu-DHP), PVC-U outer shell Ø 65,5mm	VX 1700 VX 2100 VX 2100 HF	Ø 92mm x 1700mm; weight 7,4kg Ø 92mm x 2100mm; weight 8,9kg Ø 92mm x 2100mm; weight 9,0kg
2	1x	TURBO rotator	ABS; clock- or anti-clockwise inlet accelerator; Ø 50mm smooth	
3	1x	Cap	LDPE; Ø 50mm sleeve	
4	2x	Mounting bracket with rubber inlay	Galvanized steel; DÄMMGULAST®; Ø 63-67mm	
5	2x	Stair bolt	Galvanized steel; M8 x 100mm	
6	1x	Coupling insert with O-ring	PVC; Ø 50mm with EPDM O-ring / Ø 50mm smooth	
7	-	Potable water connections	1/2" inner thread (BSP-Par.), with stainless steel reinforced ring	
8*		Middle T-sprout	PVC; Ø 65,5mm x 3/4" inside thread (BSP, parallel)	
9*	-	Potable water connection(middle)	3/4" inner thread (BSP, parallel); cold water inlet	
10*	1x	Double nipple with sealing	Brass; 3/4" outside thread (BSP, parallel); nitrile rubber seal	

*) only for VX 2100 **HF** (cold water inlet to middle connection)




Content and Sketches

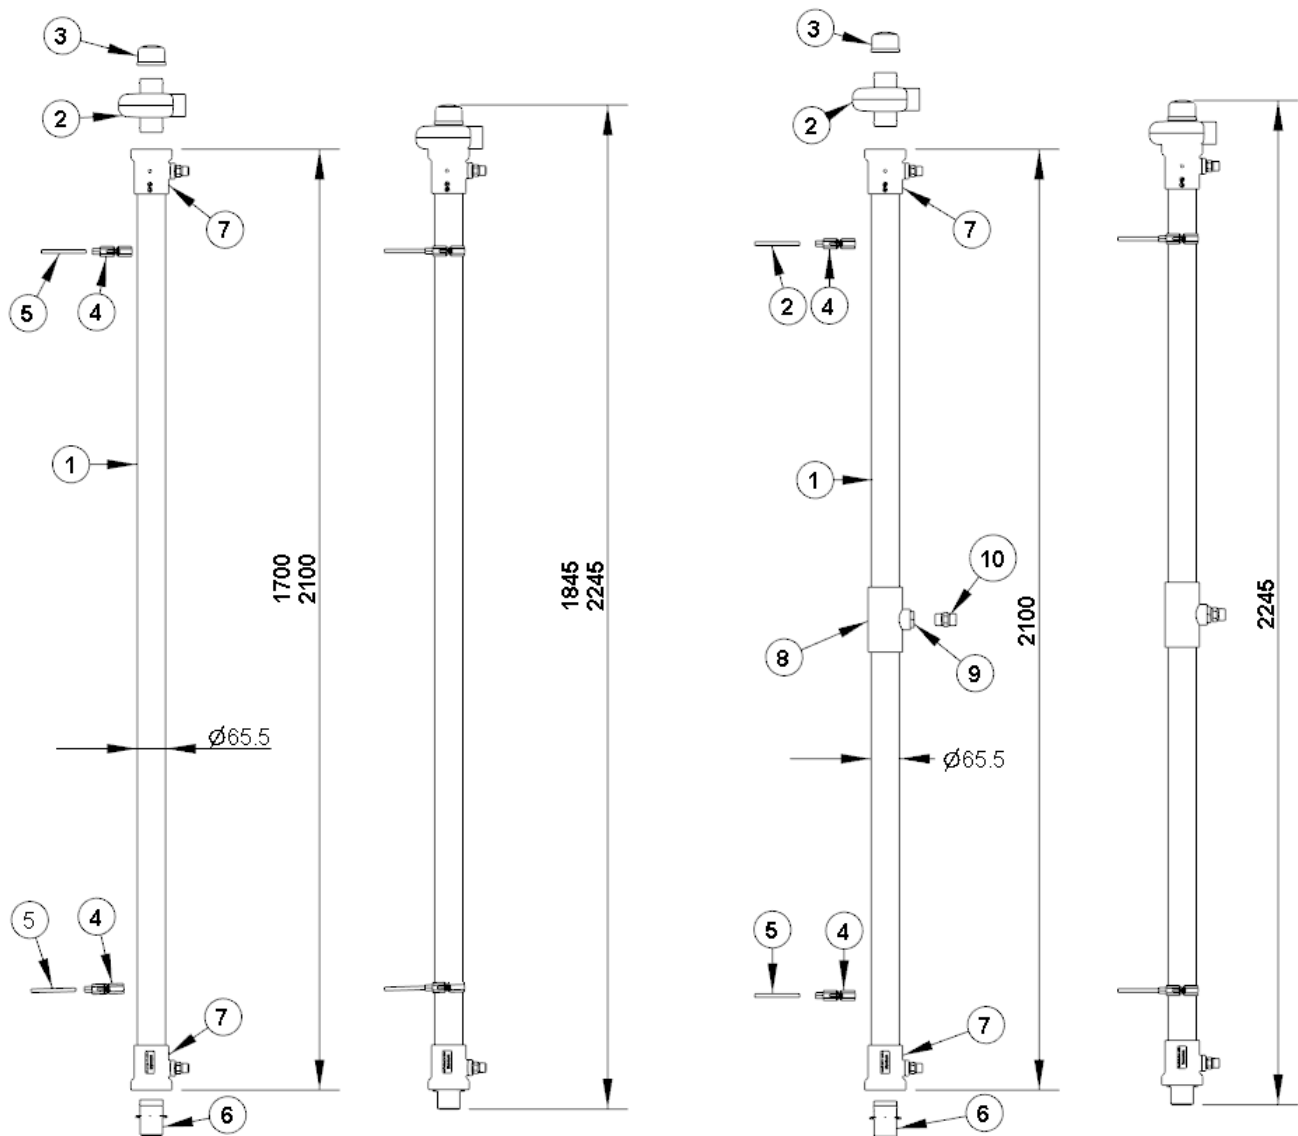

Technical Specification & Performance

Connection Schemes

	VX 1700	VX 2100	VX 2100 HF
Efficiency (KIWA, conform NEN7120 / NTA8800; 9,2 l/min)	60,0%	65,2%	-
Efficiency (KIWA, conform NEN7120 / NTA8800; 12,5 l/min)	55,5%	62,5%	52,6%
BCRG approval / Passivhaus certified	Yes / Yes	Yes / Yes	Yes / Yes
Pressure drop (9,2 l/min)	0,26 bar	0,39 bar	0,10 bar
Advised max. flowrate potable water	15 l/min	15 l/min	30 l/min
Advised max. flowrate wastewater	30 l/min	30 l/min	30 l/min
Content potable water	0,30 ltr	0,35 ltr	0,36 ltr
Max. pressure (potable water side)	10,0 bar (PN10)		
Max. pressure (wastewater side)	0,5 bar		
Advised max. temperature	60 °C		

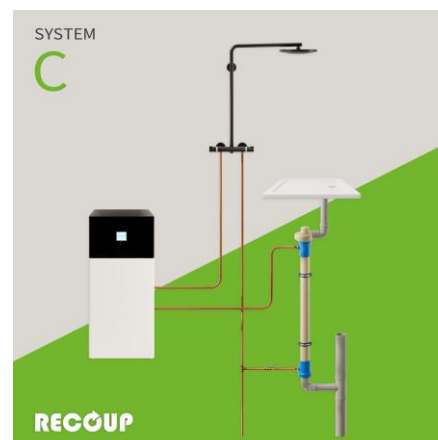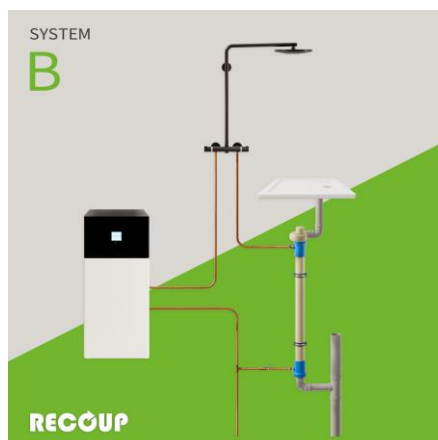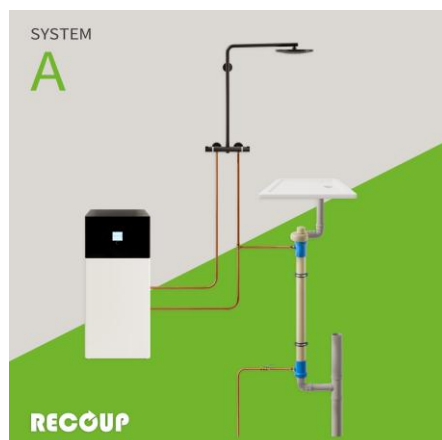

Energy savings:

Connection according to system A gives maximum efficiency. Connection according to system B or C causes a limited loss of efficiency. It may require additional calculations to determine the exact savings in your situation.

Warranty:

Recoup provides a **10-year warranty**; improper installation will invalidate the warranty.

Safety:

For application of a shower heat exchanger, a double separation between wastewater and potable water must be accomplished in accordance with European regulations (NEN 1717). The Recoup Shower Pipe meets this requirement by pinching two copper pipes together. This is a very robust and reliable construction, where the contact between the two pipes is very firm, and independent of the present water pressure. This design meets all safety requirements, and you can connect the shower pipe directly to the sewer system, without any atmospheric break.


In most EU countries a non-return valve in the cold-water supply is mandatory. See “applicable regulations” below on page 5.

Comfort:


The use of a thermostatic shower mixer is highly recommended.

Maintenance: The Recoup Shower Pipe VX is maintenance-free.


Considerations before mounting

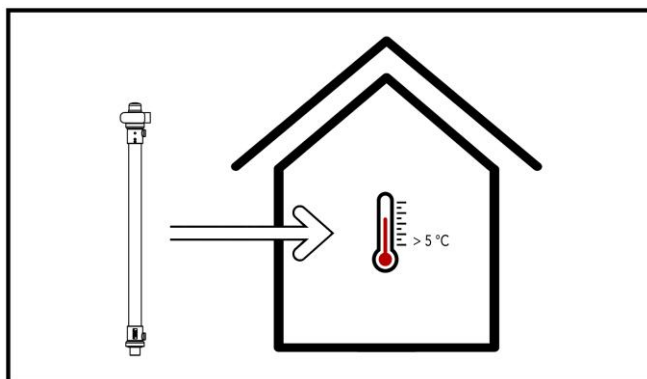


Mount in a frost-free space

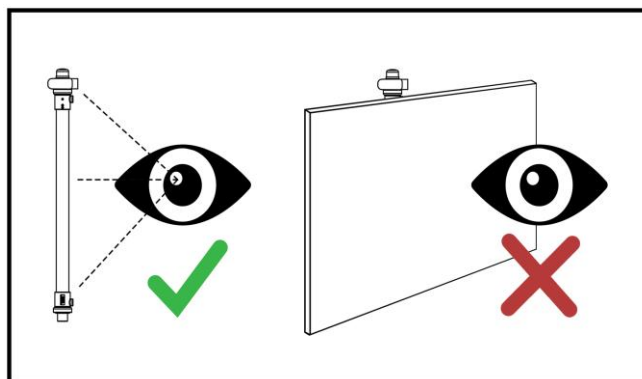

Mount in an accessible space

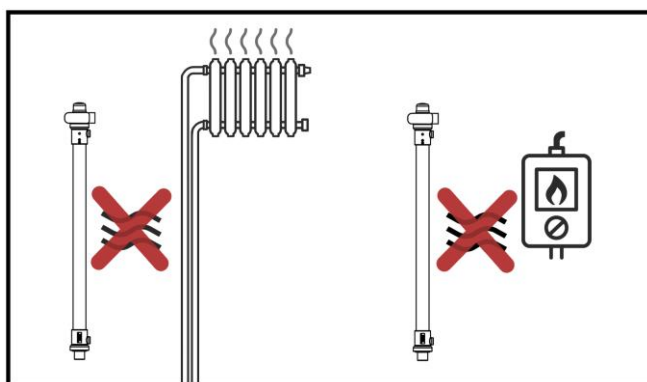

Do NOT mount near other heat sources

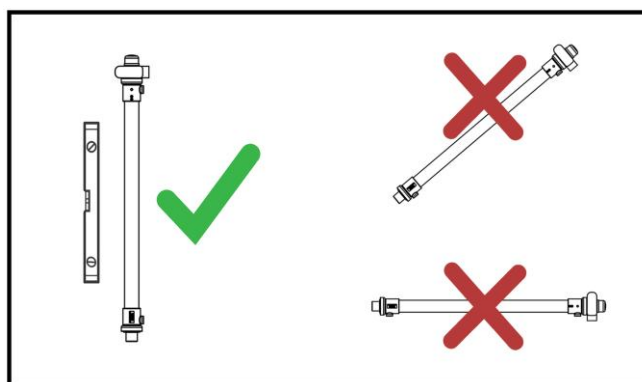

Mount vertically, using a leveler


APPLICABLE REGULATIONS:

Install this product in accordance with this manual and applicable installation and safety regulations!


Flush the pipes thoroughly with potable water before connecting the product. Only use drinking water that meets the requirements of the applicable national and/or regional drinking water ordinance.

In most countries, a guideline is available for installing shower heat recovery units. Installation in the meter cupboard is often permitted, provided that the compartment of the WWHRS unit is properly separated from electrical cupboard. Please inform yourself about the exact regulations in your country/region.


Mounting Instructions

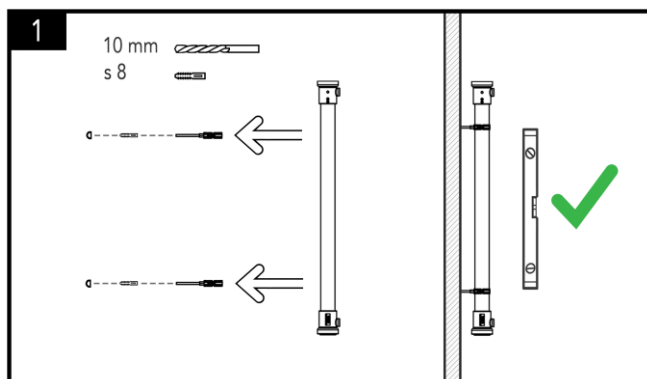


Mount the shower pipe vertically on the wall,

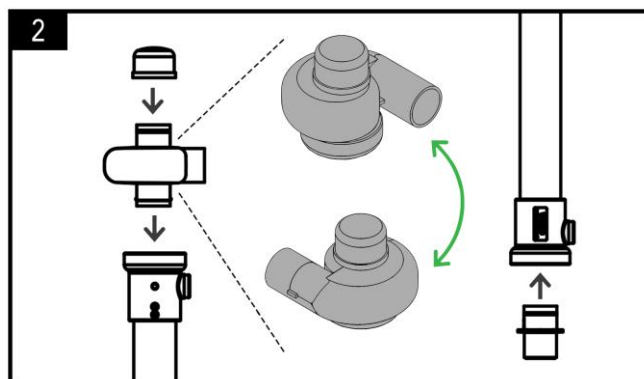


Place the TURBO rotator (top) and connector (bottom),

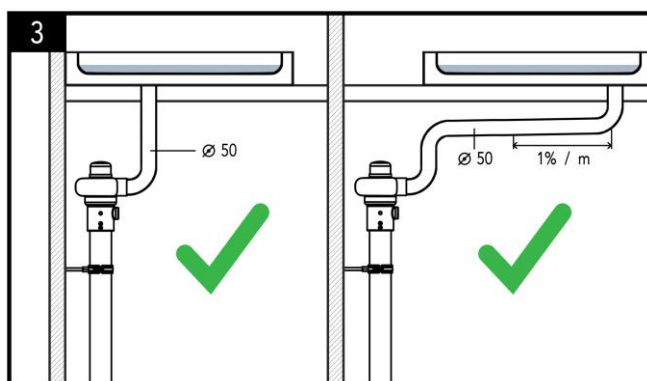

Connect the shower drain pipe to the rotator,

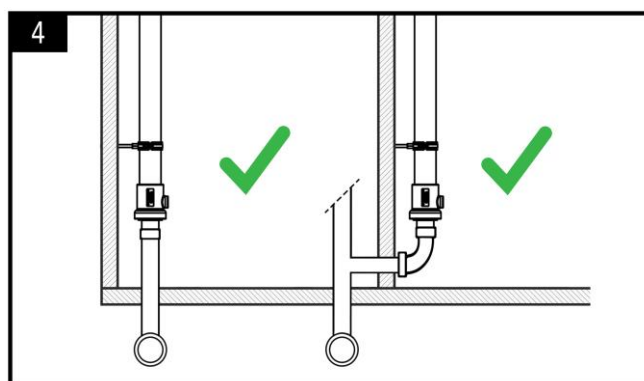


And the bottom of the shower pipe on the sewer.

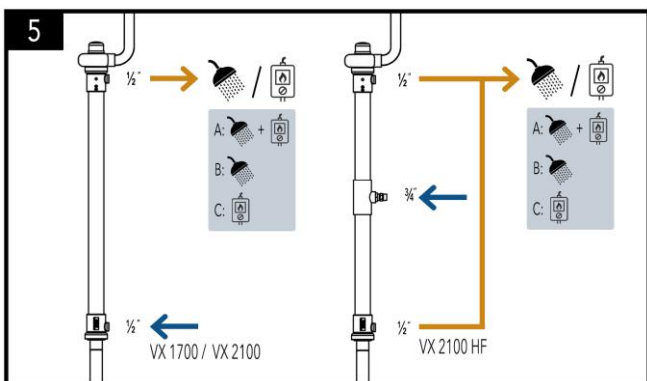

Connect the cold water supply at the bottom (model HF: middle), and lead the preheated water from the outlet (s) to:

- A: the shower tap *and* the water heater, or
- B: the shower tap only, or
- C: the water heater only.

(see schemes on page 4)

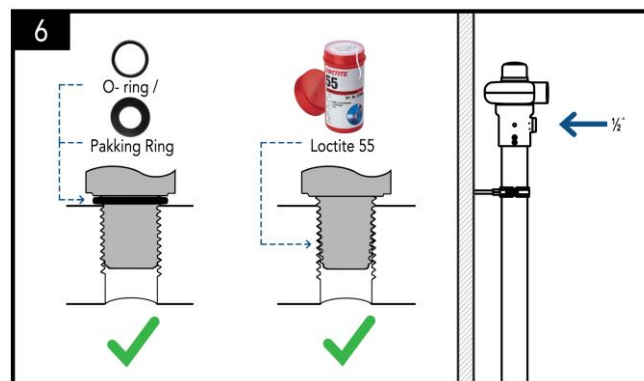

Preferably use sanitary fittings with a ½" BSP conical male thread, and use a little (!) Loctite 55 fiber thread for sealing. **DO NOT OVERTIGHTEN** the fitting; tighten by hand first, and then 1 to 2 extra turns; this should be sufficient!

When using parallel thread fittings, a gasket or O-ring should be used for sealing.

PS: for model **HF**, the supplied brass double nipple ¾" must be used in the central connection! A sanitary fitting with ¾" BSP female thread can then be mounted on this nipple.